



# **Cadmium Alternatives: Zinc-Nickel Electroplating & Repair of Aluminum Coatings**

Presented at:  
SERDP/ESTCP Workshop  
February 27, 2008

Presented By:  
Stephen Gaydos  
Technical Fellow – M&P  
Boeing – St. Louis  
Environmental Assurance

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE <b>27 FEB 2008</b>		2. REPORT TYPE		3. DATES COVERED <b>00-00-2008 to 00-00-2008</b>	
4. TITLE AND SUBTITLE <b>Cadmium Alternatives: Zinc-Nickel Electroplating &amp; Repair of Aluminum Coatings</b>				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) <b>Boeing,P. O. Box 516,St. Louis,MO,63166</b>				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT <b>Approved for public release; distribution unlimited</b>					
13. SUPPLEMENTARY NOTES <b>Surface Finishing and Repair Issues for Sustaining New Military Aircraft Workshop, February 26-28, 2008, Tempe, AZ. Sponsored by SERDP/ESTCP.</b>					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT <b>Same as Report (SAR)</b>	18. NUMBER OF PAGES <b>32</b>	19a. NAME OF RESPONSIBLE PERSON
a. REPORT <b>unclassified</b>	b. ABSTRACT <b>unclassified</b>	c. THIS PAGE <b>unclassified</b>			



# Zinc-Nickel Performance Update

# LHE Alkaline Zn-Ni Plating Development



- Project Goal
  - Develop an LHE (Low Hydrogen Embrittlement) Version of Alkaline Zn-Ni Plating for HSS Aircraft Parts
    - Look at Different Zn-Ni Formulas
    - Remove Brighteners and Other Additives to Create Low Embrittling Plating Process
- Based on Successful Test Results an LHE Alkaline Zn-Ni Formula was Selected for Further Development
  - Identified as IZ-C17 (contains 13 to 17% Ni)
  - Has Good Corrosion Performance
  - Passes Hydrogen Embrittlement and Re-Embrittlement Testing with ASTM F 519 Ty 1a.1 and 2a Test Specimens
    - Re-Embrittlement Test Specimens Exposed to Distilled Water and 3.5% Salt Water

# IZ-C17 Zn-Ni Plating Tank



- 60 L Plating Tank Installed in Laboratory



# IZ-C17 Zn-Ni Plating Process



## IZ-C17 Zn-Ni Process

- Solvent Clean
- Grit Blast
- Water Rinse
- IZ-C17 Zn-Ni Plate
- Rinse
- Embrittlement Bake
- Rinse
- Chromate Conversion Coat
- Rinse

Zn-Ni Process is Easier and Less Hazardous Than Cadmium Plating


## Cadmium Process

- Solvent Clean
- Grit Blast
- Water Rinse
- Cadmium Plate ( $\text{Cd} + \text{CN}^-$ )
- Rinse
- Chromic Acid Neutralize ( $\text{Cr}^{+6}$ )
- Rinse
- Embrittlement Bake
- Nitric Acid Activate ( $\text{HNO}_3$ )
- Rinse
- Chromate Conversion Coat
- Rinse


# IZ-C17 Zinc-Nickel Corrosion Tests



- LHE Cadmium Plating (Top) and IZ-C17 Zinc-Nickel Plating (Bottom)
  - Scribed ASTM B 117 Salt Spray Test after 1000 Hours Exposure
    - No Red Rust in Scribed Areas

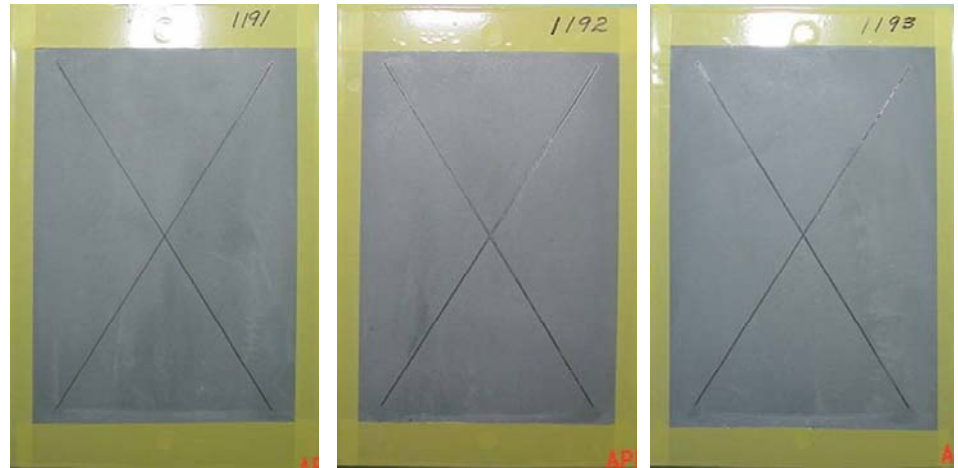

LHE Cadmium Plating – 1000 Hrs. ASTM B 117 Salt Spray Exposure

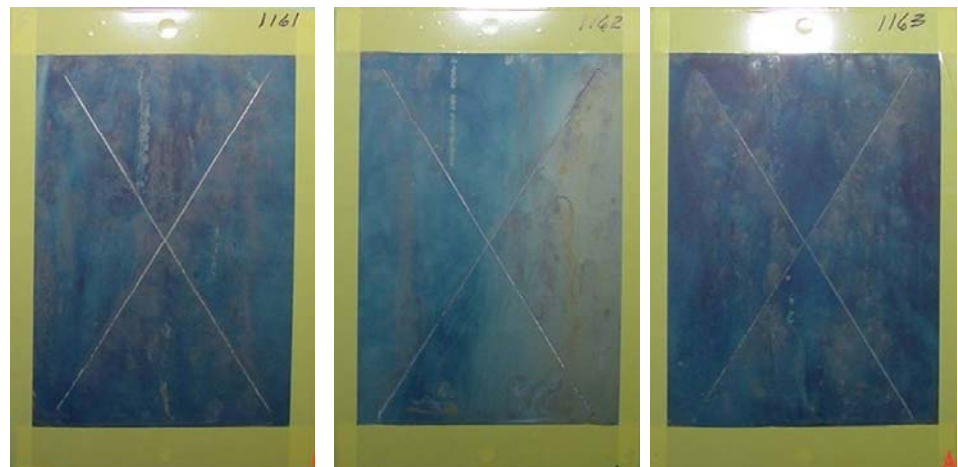


LHE Zinc-Nickel Plating – 1000 Hrs. ASTM B 117 Salt Spray Exposure

# IZ-C17 Zn-Ni Adhesion and Thickness



- **IZ-C17** Has Good Adhesion and Uniform Thickness

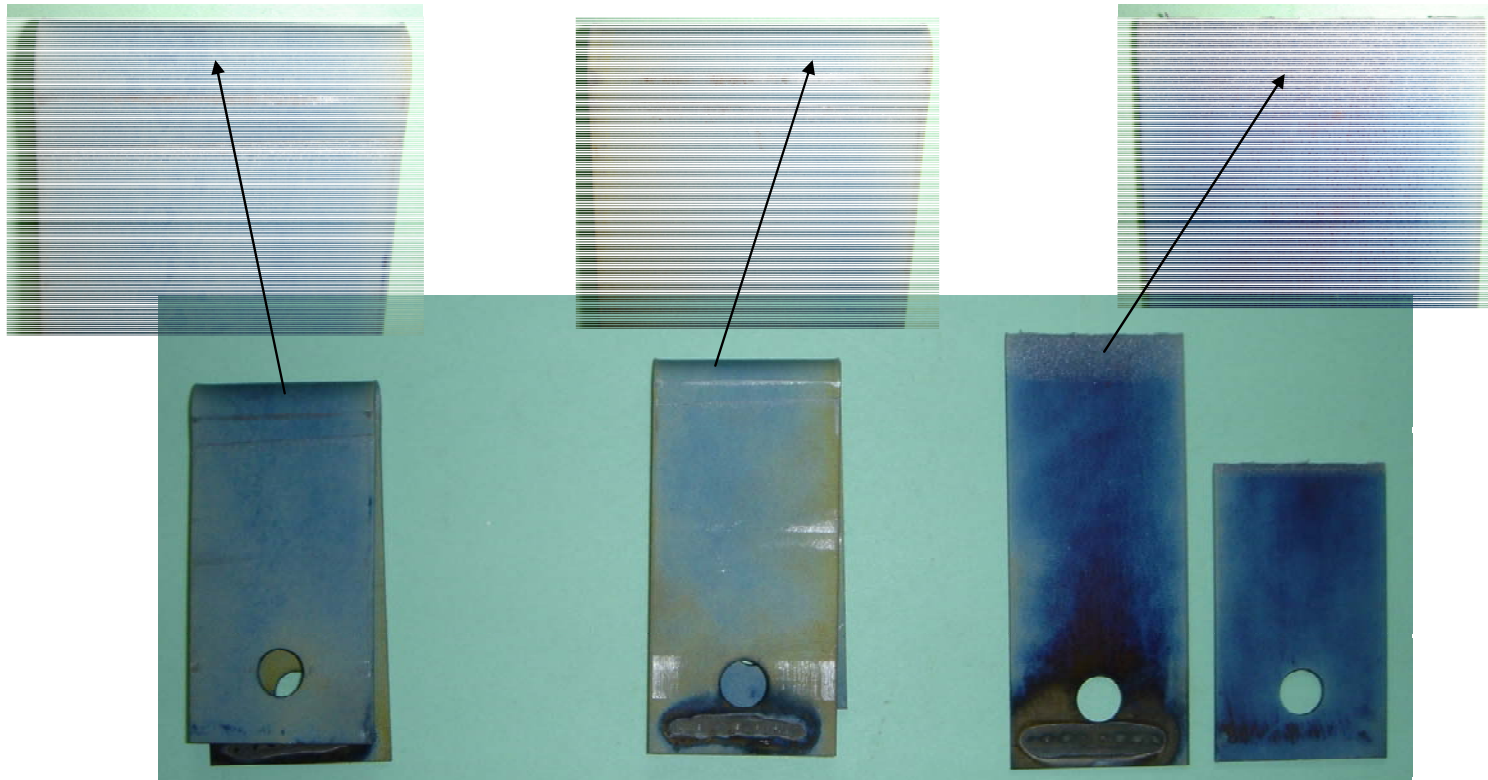

Sample # 3061

Thickness =  $0.45 \pm 0.02$

DAC Adhesion = Pass

Sample # 3062

Thickness =  $0.47 \pm 0.02$

DAC Adhesion = Pass

Sample # 3063


Thickness =  $0.44 \pm 0.04$

Mil Spec Adhesion =  
Pass

LHE IZ-C17 Zinc-Nickel on Steel



# JCAT Throwing Power Test

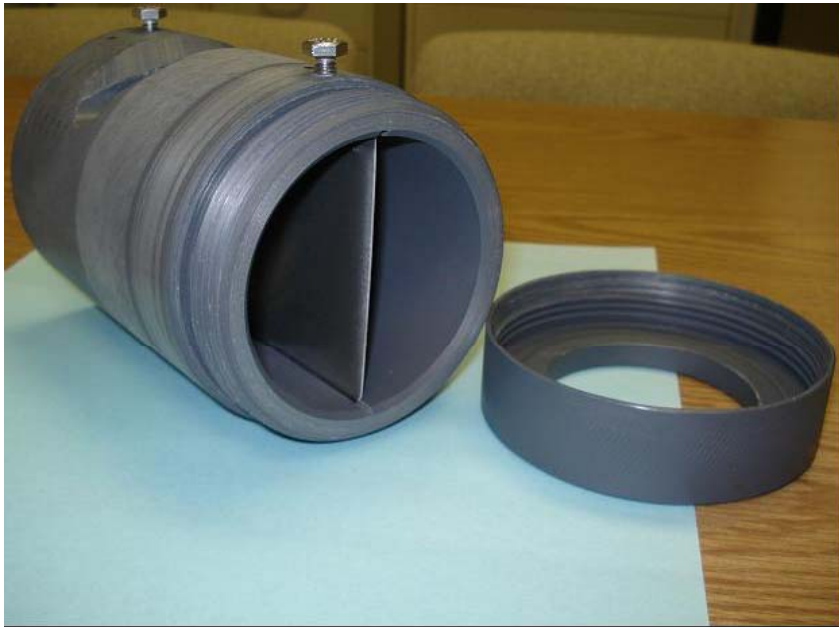

Hull Cell Test Panel Inserted  
In Plastic Tube



Tube with Hull Cell Test Panel  
Placed in Zn-Ni Plating Bath

# IZ-C17 Type 2a HE Testing



# IZ-C17 Fatigue Test Specimens



# 2007 Testing of IZ-C17 Zn-Ni Plating



- Numerous Qualification Tests with IZ-C17 LHE Zn-Ni Plating Completed in 2007 – Report Issued to Air Force
  - Hydrogen Embrittlement (1a.1, 1a.2, 2a)
  - Adhesion and Metallurgy
  - Corrosion Testing (Salt Spray and Galvanic)
  - Fluid Immersion (ASTM F 483)
  - Lubricity (Fasteners)
  - Strippability
    - Ammonium Nitrate (pH 10)
    - Dilute Hydrochloric Acid
  - Throwing Power (JCAT Method)
  - Fatigue

# Zinc-Nickel vs. Cadmium Score Sheet



Properties	LHE Cadmium	IZ-C17 LHE Zinc-Nickel
Corrosion - Salt Spray	1000 hours	+ 1000 hours
Hydrogen Embrittlement (1a.1)	Pass	Pass
Hydrogen Re-Embrittlement - Water	Marginal	Pass
Hydrogen Re-Embrittlement - Salt Water	Fail	Pass
Throwing Power	Poor	Good
Fatigue	Good	Good
Lubricity	Good	Needs Lubricant
Electrical Properties	Good	TBD
Fluid Immersion	Good	Good
Strippability	Good	Good*

\* Dilute HCl Solution - Strips Zn-Ni in 10 seconds and is Non-Embrittling

# Evaluation of IZ-C17+



- Dipsol has Improved the LHE Zinc-Nickel Plating Bath with Better Stability and Longer Plating Bath Life
  - IZ-C17+
- IZ-C17+ is Similar to IZ-C17 But Contains Better Stabilizers and Bath Life Extenders
- Preliminary Tests Have Shown that IZ-C17+ is Equivalent in Performance to IZ-C17
  - Tests Performed with Tri-Chrome Conversion Coating
- SBIR Project to Implement LHE Zn-Ni Plating at Air Force ALC
  - Boeing Partnered with ES3
  - IZ-C17 or IZ-C17+ Will Be Used for This Application

# IZ-C17+ Zn-Ni Plating Process



## IZ-C17+ Zn-Ni Process

- Solvent Clean
- Grit Blast
- Water Rinse
- IZ-C17+ Zn-Ni Plate
- Rinse
- TriCr Conversion Coat
- Rinse
- Embrittlement Bake

**TriCr CC on Zinc-Nickel Is Not Affected by the 375°F Baking Temperature**

## IZ-C17 Zn-Ni Process

- Solvent Clean
- Grit Blast
- Water Rinse
- IZ-C17 Zn-Ni Plate
- Rinse
- Embrittlement Bake
- Rinse
- Chromate Conversion Coat
- Rinse

**IZ-C17+ with TriCr CC Process is Easier and Less Hazardous Than IZ-C17 with HexCr CC**

# 2008 Tasks to Implement Zn-Ni



- Issue DPS for LHE Zn-Ni Plating
- Set-Up Larger Tank (200 to 400 Gallon) for Production Process Control Testing
- Continue to Evaluate Tri-Chrome Conversion Coating on Zn-Ni
- Develop an Accelerated Hydrogen Embrittlement Test
- Perform Hydrogen Re-Embrittlement Tests with Maintenance Fluids (Cleaners and Paint Strippers)
- Perform Additional Fatigue Tests
- Evaluate Performance of Aircraft Paint Systems on Zn-Ni
- Develop Touch-Up Brush Plating to Repair Zn-Ni
- Evaluate Electrical Bonding and Grounding Performance
- Identify Lubricant System for Zn-Ni Plated Fasteners





# Repair of Aluminum Coatings Update

# Current IVD Al Repair Methods



- IVD Aluminum Repair Methods on HS Steel Alloys
  - Condition 1: Bare IVD Al on Steel
    - Touch-Up with Brush Cd Plating
  - Condition 2: Painted IVD on Steel
    - Remove rust and scratches
    - Apply two coats epoxy primer
    - Apply one coat sprayable or brushable sealant
    - Apply two coats polyurethane top coat
- IVD Al Repairs Shall Not Exceed 5% of Total Part Area or 0.5 in<sup>2</sup> per Individual Area
  - Repairs That Exceed Limits
    - IVD Al Shall Be Stripped and Reapplied

# Alternative Al Coatings and Repairs




- IVD Aluminum Coating Alternatives Being Developed or Implemented for High Strength Steel
  - Sputter Aluminum
  - Electroplated Aluminum – Alumiplate
  - APCVD Aluminum
- An Environment Friendly Repair Method is Needed for These Environment Friendly Coating Processes
  - Sn-Zn Brush Plating
  - Zn-Ni Brush Plating
  - SermeTel 249/273
  - Cold Spray Aluminum

# Brush Plating




- Potential Candidates Considered
  - LDC 5030 Sn-Zn and SIFCO 4018 Zn-Ni
- LDC 5030 Sn-Zn Selected Because of No-Bake Hydrogen Embrittlement Performance
- Aluminum Surface Preparation for Brush Plate
  - Bare Aluminum – Poor Adhesion
  - Zincate Brush Treat – Inconsistent Results
  - Nickel Strike – Good Adhesion
- Corrosion and Adhesion Tests Performed with Brush Sn-Zn and Cadmium Applied to Damaged IVD Aluminum Steel Test Panels

# Repair Test Specimens

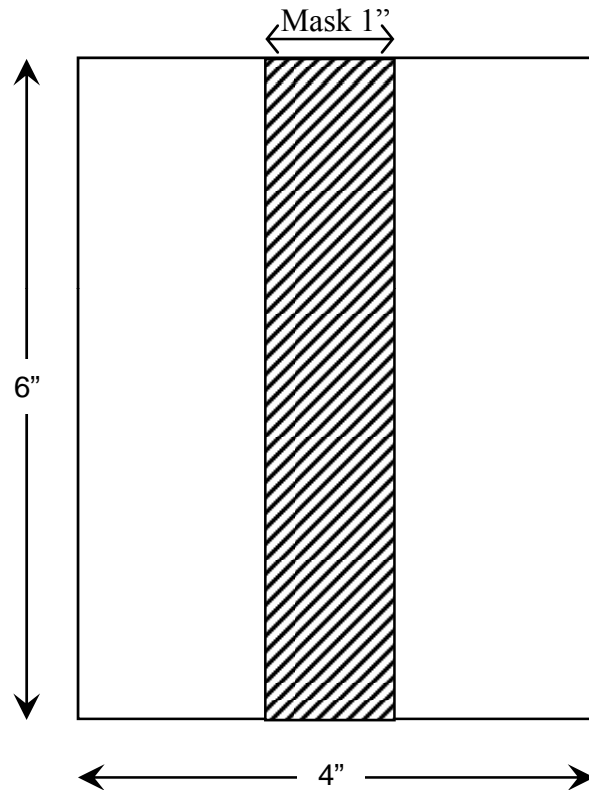

Corrosion Test Specimen

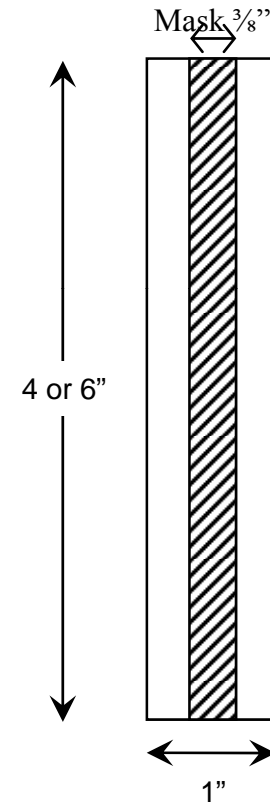

Adhesion Test Specimen

**4130 Steel with IVD Aluminum Applied**

# Brush Tin-Zinc on IVD Al



**ASTM B 117 1000 Hours**

**Brush Cd Repair  
on IVD Al**



**Brush Tin-Zinc  
Repair on IVD Al**



# Brush Plating Properties



- Adhesion of LDC 5030 Brush Sn-Zn on IVD Aluminum is Good with the Nickel Strike
- Fatigue Test Results for Brush Sn-Zn are Similar to Brush Cd Plate



# SermeTel 249/273




- Repair Specimens Prepared for JG-PP JTP Phase I
  - SermeTel 249/273 Applied to Bare Steel for Hydrogen Embrittlement and Adhesion Testing in Phase I
    - Failed Adhesion but Passed HE Tests
- Additional Type 1a.1, 1x4 and 4x6 Samples Prepared and Shipped to CTC for Phase II Testing
  - No Results to Report

**SermeTel  
249/273**





# Cold Spray Aluminum

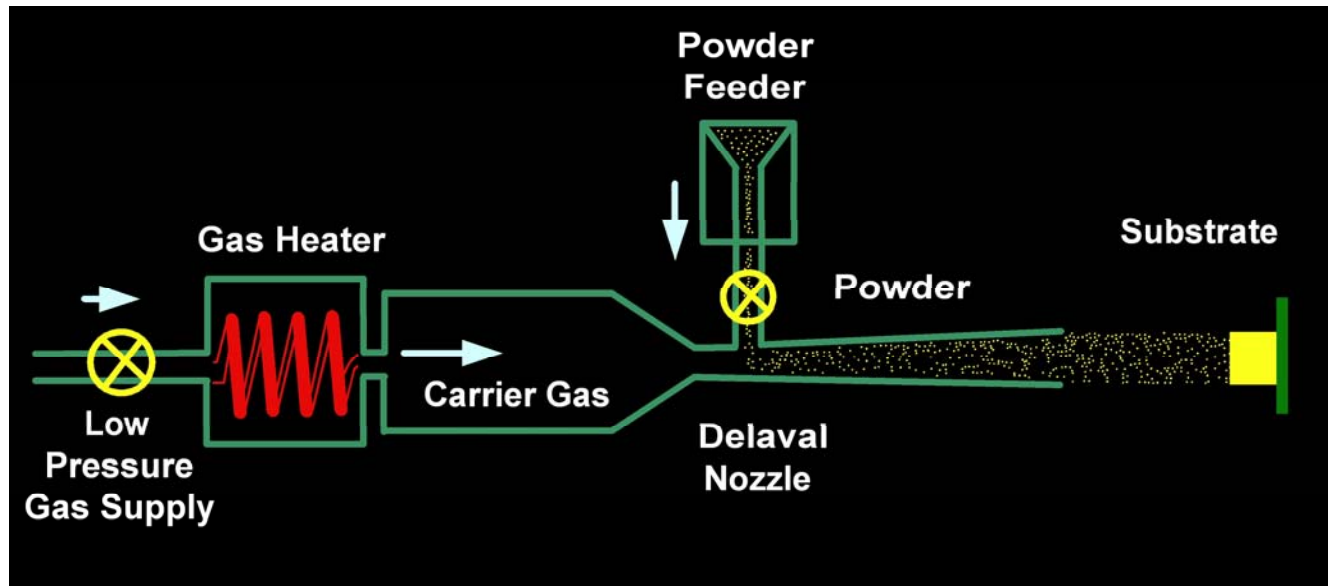


- Cold Spray – Particles Impacting on Substrate Do Not Melt
- Process Adaptable to Wide Variety of Operating Conditions (Supply Gases, Gas Temperature, Powders, Feeder Designs, Nozzle Designs, Manual or Robotic Application)

# Cold Spray Aluminum



- Need Robust and Easy to Operate Portable Cold Spray Equipment For Repair of Aluminum Coatings
- Equipment and Processes Available from Several Different Companies
  - Dymet
  - Centerline
  - K-Tech
  - ARL
  - Innovati
  - Delphi
  - ASB
    - CGT
  - Etc.

# Dymet

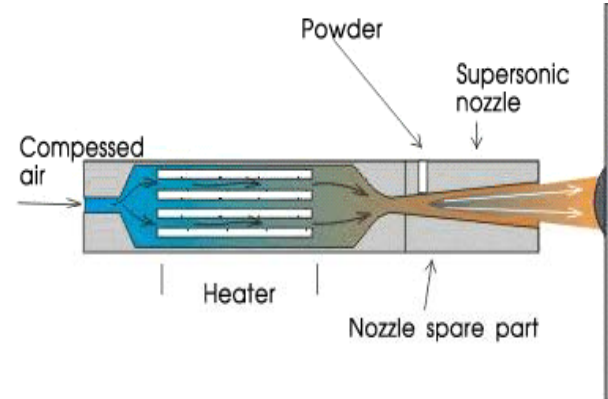

- Steel Test Samples Sent to Obinsk Center for Powder Spray (OCPS) for Application of Cold Spray Al with Dymet Equipment
- Coating Appearance was Acceptable But System Did Not Seem to be Operator Friendly

# Dymet Results



- Test Results for Steel Samples Received from OCPS with Dymet Cold Spray Al Coatings
  - Good Adhesion
  - Good Corrosion Performance (1000 Hr B 117 Scribed – No Rust)
  - Process is Non-Embrittling to HS Steel
  - Thickness 1.5 to 2 mil

## CP11 - DYMET Cold Spray Aluminum



Passed Bend to Break Adhesion Tests

# Centerline SST



- Centerline SST Unit is Improved Version of Dymet Equipment

*MEET YOUR NEW **WINGMAN...***



PERMANENT

PORTABLE

PERFECT

# SST Results for Cold Sprayed Al




- Adhesion Testing Carried Out on Steel and IVD Aluminum
  - Passed Tape Adhesion Test
  - Passed Glass Bead Burnish Adhesion Test at 60 psig
    - This is the Adhesion Test Used for IVD Al
  - Some Flaking on Bend-to-Break Test
- Corrosion Test Results Carried Out on Damaged IVD Aluminum Steel Panels
  - Exceeded MIL-DTL-83488 Requirement

# Corrosion Test of SST Cold Spray Al




ASTM B 117 1008 Hours

Cold Sprayed Al  
Applied Robotically

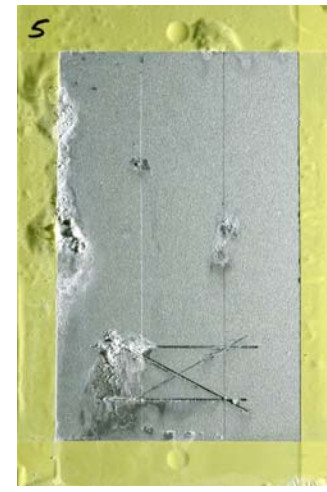

Cold Sprayed Al  
Applied Manually

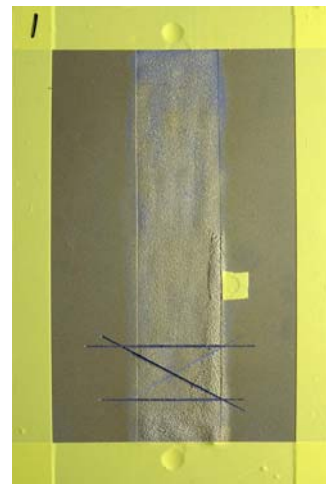

0 Hours

1008 Hours

# Cold Spray Test Plans



- Purchase Centerline SST Portable Unit
  - Develop Process to Repair Damaged Aluminum Coatings
    - Thickness
    - Adhesion
    - Corrosion
    - Fatigue
    - Hydrogen Embrittlement
- Continue to Work with Other Cold Spray Vendors and Laboratories to Repair
  - Damaged Alclad Aircraft Skins
  - Damaged Aluminum Aircraft Parts



# Questions?

